

# **Hypertherm<sup>®</sup>**

## ***HyIntensity™ Fiber Laser HFL010***



**LASER CUTTING MADE EASY**


# *HyIntensity Fiber Laser*

***For over 40 years, Hypertherm has focused on providing advanced technology products that cut the cost of cutting metal. Now with the advent of fiber laser technology, dramatically reducing laser complexity and operating cost, Hypertherm brings this focus to fine-feature laser cutting in a way only Hypertherm can ... making laser cutting easy.***

## **Fiber Laser technology: solid state simplicity, efficiency, and reliability**

HyIntensity Fiber Laser systems use a low-maintenance solid-state laser source to generate a laser beam that is delivered through a fiber optic cable to the laser head. The glass fiber transfers the beam with a beam quality tailored for cutting metal.

The fiber optic technology enables more flexible table integration without the table size restrictions associated with CO<sub>2</sub> lasers. Three times more energy efficient than CO<sub>2</sub>, HyIntensity Fiber Laser systems are a cost-effective solution for fine-featured cutting with no mirrors to maintain and calibrate and no lasing gas.

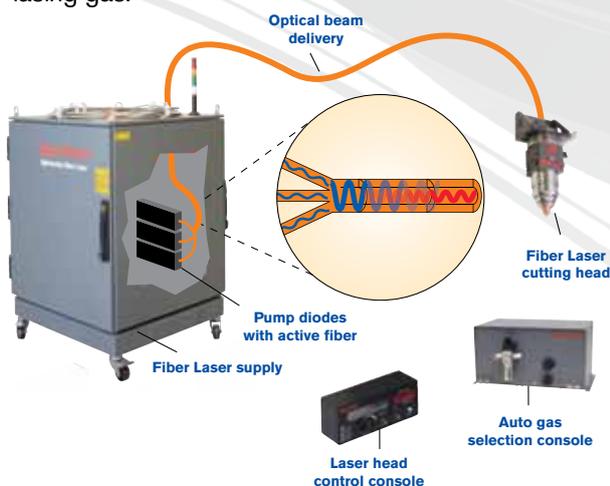

*Multiple solid state pump diodes are combined to generate the laser beam which is then transmitted through a flexible delivery fiber to the laser cutting head.*


*Higher cut speeds, lower operating costs, higher productivity than CO<sub>2</sub> or plasma on material thicknesses below 6 mm.*

## **Thin materials advantages**

- Fiber laser enables cutting more reflective material including copper and brass.
- Fiber Laser cutting is faster.
- Fiber laser cutting produces a high quality edge.
- Fiber laser cutting provides the lowest cost per part.

## **Total cost of ownership**

5 year outlook

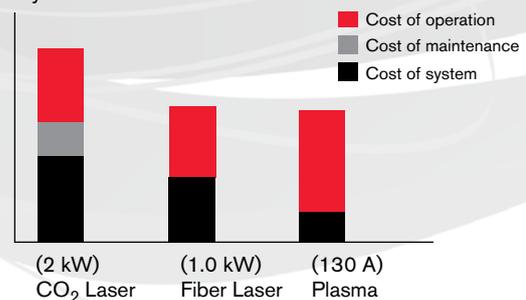



### **HylIntensity Fiber Laser HFL010: a fully optimized cutting system**

*HFL010, a complete fiber laser system specifically optimized for cutting applications, makes it easy to produce consistent laser quality across a full range of materials and thicknesses.*

- 1.0 kW fiber laser supply with rated cutting capacity up to 10 mm mild steel (6 mm stainless steel).
- Tightly integrated system design for ease of operation, and reliable, consistent process optimization.
- Pre-set optimized cutting parameters for a full range of materials (mild steel, stainless steel, aluminum) and thicknesses.
- Ability to cut and mark with the same consumables for easy process changeover and efficient operation.
- Fiber laser cutting head (LF150): integrated capacitive height control (patent pending).
- Laser head control console: point of use process and diagnostic information.
- Auto gas selection console: enables consistent cut quality and rapid process change over.
- 2-year warranty.

### **Applications: expanding customer access to high-precision fine-feature cutting**

*More easily integrated into a wider range of cutting machine types (compared with CO<sub>2</sub>) and significantly more affordable to operate, Hypertherm's HylIntensity Fiber Laser enables more steel fabricators to add high-precision cutting capability to their operations.*

- Superior cut quality and tolerances for fine-feature cutting on materials from gauge to plate thicknesses.
- Easily integrated onto a broad variety of high-quality cutting machines.
- Laser cutting technology that can be effectively combined with plasma to deliver the highest productivity and exceed tolerance and quality requirements for most plate applications.




## Specifications

Auto voltage input	VAC 400 – 480	Hz 50/60	Amps 30 A/3-PH
Duty cycle	100% at 40° C		
Safety	IEC#: EN ISO 13849-1 PL:e+ Safety glasses OD 5+ @ 900 – 950 nm, OD 7+ @ 950 – 1200 nm External E-stop switch with (2) NO contacts External door interlock switch with (2) NO contacts		
Dimensions	147 cm H, 82 cm W, 93 cm L		
Weight	196 kg		
Gas supply	Air: 9 bar O <sub>2</sub> : 8 bar N <sub>2</sub> : 27 bar		
Output power	1000 W nominal		
Emission wavelength	1070 ± 10 nm		
Emission bandwidth	3 nm typical; 6 nm maximum		



- Fiber laser supply (HFL010): 1.0 kW with 3 times greater energy efficiency than CO<sub>2</sub>.

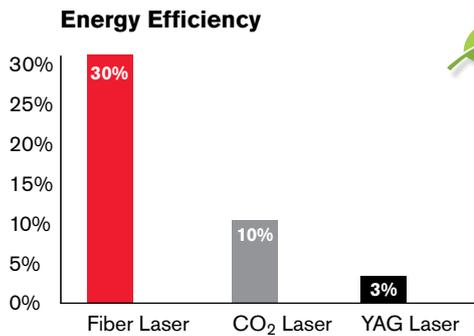

- Fiber laser cutting head (LF150): integrated capacitive height control (patent pending).
- Laser head control console: point of use process and diagnostic information.
- Auto gas selection console: enables consistent cut quality.
- New fiber beam delivery, cables and hoses.
- Common control platform using Hypertherm controls, nesting and process optimization software and Hypernet<sup>®</sup> communication protocol.
- Hypertherm is ISO 9001:2000 certified.
- Hypertherm full-system warranty – complete coverage for two years on all system components and one year on the laser head and beam delivery optics.

## Operating data

Virtually dross-free cutting capacity – mild steel 10 mm  
 Production pierce capacity – mild steel 10 mm  
 Maximum cutting capacity (edge start) – mild steel 10 mm

Material	Thickness (mm)	Approximate cutting speed (mm/min.)
Mild steel	1	7620
	2	3810
	3	2030
	5	1650
	6	1150
	10	760
Stainless steel	1	7110
	2	3555
	3	1400
	5	760
	6	510
	Aluminum	2
3		1270

*Cutting results will vary with material composition, gas purity, and machine motion.*

*Fiber Laser supply is EN ISO 13849-1 Performance Level (PL) E+ standard safety rated.*

*Fiber Laser supply is NEMA 12 rated (sealed to dust for reliable functionality).*



**Hypertherm<sup>®</sup>**  
**Cut with confidence<sup>®</sup>**

Hypertherm, Hypernet, and HyIntensity are trademarks of Hypertherm, Inc., and may be registered in the United States and/or other countries.

[www.hypertherm.com](http://www.hypertherm.com)